



**STABILIAN™**  
BASICALLY GOOD

## BIPOD

Acting as the most robust shooting platform Stabiliant High Recoil Resistant, heavy duty quick detachable Bipods are Stable, Sturdy and specially made for stringent Military requirements. The Bipods are ruggedly built to withstand and operate in extreme environmental conditions from  $-40^{\circ}$  to  $+70^{\circ}$ . It has strong pivoting mechanism with preloaded  $\pm 30^{\circ}$  cant and pan in either direction of center and is available in any camouflage painting pattern

### UNIQUE FEATURES:

- High Recoil Resistant
- Compact, Light weight and easy to carry
- Can be used as a vertical fore grip if required
- Silently Deployable legs
- Forward and backward Installation when needed
- Material: Aircraft quality 6061-T6 aluminium alloy with extreme duty connection points and fasteners
- Finish: Non- reflective matte black combat finish
- Tool-Less Installation
- The Bipod legs can be folded and locked in a full forward position, deployed and locked in a  $45^{\circ}$  degree forward position, or deployed and locked in the standard straight down position



### OTHER AVAILABLE COLOURS:



Sand



OG



Whole  
Black



Camo 1



Camo 2

**Product Technical Specification & Colour options  
can be customized as per customers need.**

## PICATINNY MOUNT

Easy to install onto any MIL-STD 1913 Picatinny rail.

## FLIP LOCK

Ergonomic Elliptical Flip Lock for Quick Deployment & Pack up

## RUBBER FOOT

Rubber all weather and all terrain foot



### TECHNICAL SPECIFICATION:

Max Height (mm)	: 330
Min Height (mm)	: 230
Pre-loaded Pan (degree)	: 30°
Pre-loaded Cant (degree)	: 30°
Leg Positions (degree)	: 0, 45, 90, 135, 180
Weight	: 700 gm

## DEFENCE PRODUCT LINE:



Riflescope




Tripod



Pan & Tilt Head



Ball Head

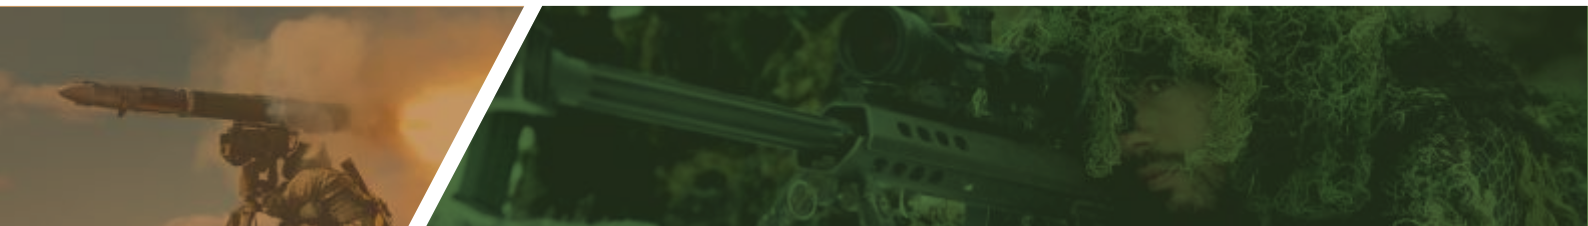

### STABILANT PRECISION POSITIONING PVT. LTD.

"Falcon", 1802, Sr. No. 47 (a b), Sus, Pune, Maharashtra, 411021, India.

Contact No.: +91 9970-827-423 / 7499-360-416

E-mail: [marketing@stabiliant.com](mailto:marketing@stabiliant.com) / [info@stabiliant.com](mailto:info@stabiliant.com) | [www.stabiliant.com](http://www.stabiliant.com)